

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 149 706 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
31.07.2002 Bulletin 2002/31

(51) Int Cl.⁷: B41J 2/175

(43) Date of publication A2:
31.10.2001 Bulletin 2001/44

(21) Application number: 01110244.9

(22) Date of filing: 25.04.2001

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 26.04.2000 JP 2000126598

(71) Applicant: CANON KABUSHIKI KAISHA
Ohta-ku, Tokyo (JP)

(72) Inventors:
• Ara, Yohji, c/o Canon Kabushiki Kaisha
Tokyo (JP)
• Inoue, Hiroyuki, c/o Canon Kabushiki Kaisha
Tokyo (JP)
• Fukazawa, Hideo, c/o Canon Kabushiki Kaisha
Tokyo (JP)
• Kurata, Tetsuji, c/o Canon Kabushiki Kaisha
Tokyo (JP)

• Hirano, Hirofumi, c/o Canon Kabushiki Kaisha
Tokyo (JP)
• Netsu, Hiroshi, c/o Canon Kabushiki Kaisha
Tokyo (JP)
• Okamoto, Hideaki, c/o Canon Kabushiki Kaisha
Tokyo (JP)
• Uetsuki, Masaya, c/o Canon Kabushiki Kaisha
Tokyo (JP)
• Hayashi, Hiroki, c/o Canon Kabushiki Kaisha
Tokyo (JP)
• Asaki, Noriyasu, c/o Canon Kabushiki Kaisha
Tokyo (JP)

(74) Representative:
Leson, Thomas Johannes Alois, Dipl.-Ing.
Tiedtke-Bühling-Kinne & Partner GbR,
TBK-Patent,
Bavariaring 4
80336 München (DE)

(54) Ink tank, ink jet recording head, ink jet cartridge, and ink jet recording apparatus

(57) An ink tank (20) has a fixed-negative-pressure generating means (31, 106) between a gas-liquid separating means (48) and a source (31) of negative pressure required to suck and supply the ink, to prevent a fixed amount or more of negative pressure from being exerted on the gas-liquid separating means (48). An ink jet recording head (20a) is installed on the ink tank (20). An ink jet cartridge is also installed on the ink tank (20). An ink jet recording apparatus has an ink tank (20) which supplies an ink to an ink jet recording head (20a) via an ink supplying port (205), a gas-liquid separating means (48) in a suction port (53) transmitting gases therethrough while not transmitting said ink therethrough, and a fixed-negative-pressure generating means (31, 106) between the gas-liquid separating means (48) and a source (31) of the negative pressure.

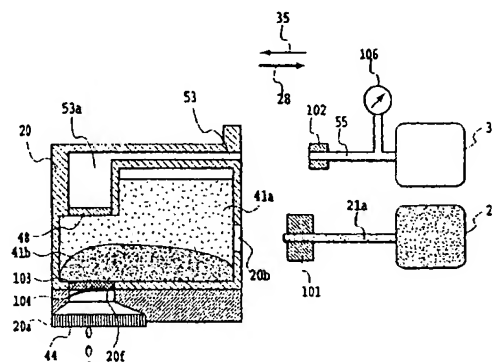


FIG.1

EP 1 149 706 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 11 0244

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 95 12109 A (SPECTRA INC) 4 May 1995 (1995-05-04) * column 4, line 24 - column 5, line 11; figure 3 * * column 7, line 4 - column 8, line 13; figure 4 *	1-16	B41J2/175
X	US 5 663 754 A (LORENZE JR ROBERT V ET AL) 2 September 1997 (1997-09-02) * column 3, line 24 - column 4, line 64; figures 2,3 *	1-16	
A	EP 0 623 472 A (MARKEM CORP) 9 November 1994 (1994-11-09) * column 3, line 14 - column 4, line 53; figures 1,2 * * column 7, line 40 - column 8, line 35; figure 4 *	1,5,9,13	
A	US 5 967 045 A (HOFMANN JOHN R ET AL) 19 October 1999 (1999-10-19) * column 4, line 44 - column 5, line 25; figures 1,2 *	1,5,9,13	TECHNICAL FIELDS SEARCHED (Int.Cl.7) B41J
A	US 6 050 682 A (CHILDERS WINTHROP D ET AL) 18 April 2000 (2000-04-18)		
A	US 4 187 511 A (ROBINSON PRENTICE) 5 February 1980 (1980-02-05)		
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 6 June 2002	Examiner Adam, E
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>I : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPC FORM 1503 (11/92) (P/24001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 11 0244


This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-06-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9512109	A	04-05-1995	CA 2118394 A1	27-04-1995
			WO 9512109 A1	04-05-1995
US 5663754	A	02-09-1997	JP 9123473 A	13-05-1997
EP 0623472	A	09-11-1994	US 5489925 A	06-02-1996
			DE 69425922 D1	26-10-2000
			DE 69425922 T2	18-01-2001
			EP 0623472 A2	09-11-1994
			EP 0933217 A2	04-08-1999
			ES 2151532 T3	01-01-2001
			GB 2278088 A ,B	23-11-1994
			GB 2297725 A ,B	14-08-1996
			GB 2297726 A ,B	14-08-1996
			JP 2745285 B2	28-04-1998
			JP 7125254 A	16-05-1995
			US 5910810 A	08-06-1999
			US 5920332 A	06-07-1999
US 5967045	A	19-10-1999	CN 1324303 T	28-11-2001
			EP 1123210 A1	16-08-2001
			WO 0023281 A1	27-04-2000
US 6050682	A	18-04-2000	US 5975689 A	02-11-1999
			DE 69802591 D1	10-01-2002
			DE 69802591 T2	23-05-2002
			EP 0857576 A2	12-08-1998
			JP 10217510 A	18-08-1998
US 4187511	A	05-02-1980	NONE	

EPO FORM P-455

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 149 706 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
31.10.2001 Bulletin 2001/44

(51) Int Cl.⁷: **B41J 2/175**

(21) Application number: **01110244.9**

(22) Date of filing: **25.04.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **26.04.2000 JP 2000126598**

(71) Applicant: **CANON KABUSHIKI KAISHA**
Ohta-ku, Tokyo (JP)

(72) Inventors:
• **Ara, Yohji, c/o Canon Kabushiki Kaisha**
Tokyo (JP)
• **Inoue, Hiroyuki, c/o Canon Kabushiki Kaisha**
Tokyo (JP)
• **Fukazawa, Hideo, c/o Canon Kabushiki Kaisha**
Tokyo (JP)
• **Kurata, Tetsuji, c/o Canon Kabushiki Kaisha**
Tokyo (JP)

• **Hirano, Hirofumi, c/o Canon Kabushiki Kaisha**
Tokyo (JP)
• **Netsu, Hiroshi, c/o Canon Kabushiki Kaisha**
Tokyo (JP)
• **Okamoto, Hideaki, c/o Canon Kabushiki Kaisha**
Tokyo (JP)
• **Uetsuki, Masaya, c/o Canon Kabushiki Kaisha**
Tokyo (JP)
• **Hayashi, Hiroki, c/o Canon Kabushiki Kaisha**
Tokyo (JP)
• **Asaki, Noriyasu, c/o Canon Kabushiki Kaisha**
Tokyo (JP)

(74) Representative:
Leson, Thomas Johannes Alois, Dipl.-Ing.
Tiedtke-Bühling-Kinne & Partner GbR,
TBK-Patent,
Bavariaring 4
80336 München (DE)

(54) **Ink tank, ink jet recording head, ink jet cartridge, and ink jet recording apparatus**

(57) An ink tank (20) has a fixed-negative-pressure generating means (31, 106) between a gas-liquid separating means (48) and a source (31) of negative pressure required to suck and supply the ink, to prevent a fixed amount or more of negative pressure from being exerted on the gas-liquid separating means (48). An ink jet recording head (20a) is installed on the ink tank (20). An ink jet cartridge is also installed on the ink tank (20).

An ink jet recording apparatus has an ink tank (20) which supplies an ink to an ink jet recording head (20a) via an ink supplying port (205), a gas-liquid separating means (48) in a suction port (53) transmitting gases therethrough while not transmitting said ink therethrough, and a fixed-negative-pressure generating means (31, 106) between the gas-liquid separating means (48) and a source (31) of the negative pressure.

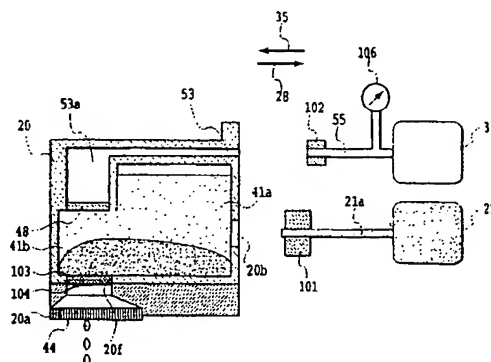


FIG. 1

EP 1 149 706 A2

Description

[0001] The present invention relates to an ink tank, an ink jet recording head, an ink jet cartridge, and an ink jet recording apparatus.

[0002] The present invention is applicable to general print apparatuses as recording apparatuses, copiers, facsimile terminal equipment having a communication system, apparatuses such as word processors which have a print section, and industrial print apparatuses combined with various processing apparatuses.

[0003] Known serial-scan-based ink jet recording apparatuses comprise a carriage that is movable in a main scan direction, an ink jet recording head acting as recording means, and an ink tank acting as an ink container, both the ink jet recording head and the ink tank being replaceably mounted on the carriage. The recording head and the ink tank are connected together via an ink passage. In such a recording apparatus, an image can sequentially be recorded on a recorded medium such as recording paper by repeating a main scan of the carriage with the recording head and the ink tank mounted thereon and a subscan of the recorded medium.

[0004] On the other hand, a possible method of supplying an ink to the ink tank of the ink jet recording apparatus is, for example, to suck and supply the ink by pressurizing the ink to introduce negative pressure into the ink.

[0005] One configuration that can be used if the ink is sucked and supplied as described above will be described below as a method for supplying an ink to an ink tank at the recording head connected thereto.

[0006] As shown in FIG. 9, in, for example, a serial-scan-based ink jet recording apparatus, a storage ink tank 20 acting as a sub-ink tank has an ink jet recording head 20a (hereafter simply referred to as a "recording head") capable of ejecting an ink for recording and is removably mounted on a carriage (not shown). The recording head 20a ejects the ink from the storage ink tank 20 through an ink ejecting port in a nozzle 44 based on image information. Further, the storage ink tank 20 has an ink supplying port 20f for supplying the ink from the storage ink tank 20 to the recording head 20a. The nozzle 44 in the recording head 20a includes an ejection energy generating means for generating energy required to eject the ink. The ejection energy generating means may comprise an electrothermal converter for generating thermal energy. The carriage is moved by an appropriate movement mechanism in the main scan direction shown by arrows 28 and 35. Further, recorded media are conveyed in a subscan direction crossing the main scan direction.

[0007] In such a recording apparatus, an image can sequentially be recorded on the recorded medium by repeating a main scan of the carriage with the recording head 20a and the storage ink tank 20 mounted thereon and a subscan of the recorded medium.

[0008] The storage ink tank 20 has a suction port 53

and an ink intake port 20b formed in a side thereof. The suction port 53 is in communication with the interior of the storage ink tank 20 via a suction passage 53a, and a gas transmitting member 48 is provided at the site of the opening of the suction passage 53a in the storage ink tank 20. The gas transmitting member 48 has, as a gas-liquid separating means, a function of transmitting gases therethrough while not transmitting inks there-through. For example, the gas transmitting member 48 preferably comprises a thin sheet formed of an ethylene tetrafluoride resin, a similar porous resin material, or the like. Additionally, the storage ink tank 20 has an ink absorber 41a accommodated therein, for sucking and holding the ink.

[0009] The storage ink tank 20 includes a filter 103 and a valve 104 in the supplying port 20f. The valve 104 is shaped like a seat and has its proximal end welded to the filter 103. The valve 104 functions to open and close the supplying port 20f depending on the internal pressure of the storage ink tank 20.

[0010] Further, a main tank 22 of the recording apparatus main body is disposed via a tube 21a with a supplying joint 101, so as to be connectable to the ink intake port 20b in the storage ink tank 20. The joint 101 and a joint 102 are disposed in the recording apparatus main body so as to lie opposite to the ink intake port 20b and the suction port 53 in the scan direction 35 of the carriage.

[0011] During a recording operation, the valve 104 is open and the ink is supplied from the storage ink tank 20 to the recording head 20a, as shown in FIG. 9.

[0012] FIGS. 10 to 14 are views useful in explaining an operation of refilling the above described ink tank with the ink.

[0013] In ink refilling, the carriage is first moved in the direction of the arrow 28 to connect the ink intake port 20b and the suction port 53 to the corresponding joints 101 and 102, as shown in FIG. 10. Subsequently, the suction pump 31 performs a suction operation to suck air from the storage ink tank 20 via the gas transmitting member 48 to set the interior of the storage ink tank 20 at negative pressure. The negative pressure in the storage ink tank 20 causes the ink in the main tank 22 to be sucked to the interior of the storage ink tank 20 as shown in FIGS. 11 and 12.

[0014] In this case, the negative pressure in the storage ink tank 20 causes the valve 104 to operate in such a way as to close the supplying port 20f, as shown in FIGS. 11 and 12. Accordingly, the ink in the recording head 20a is not sucked to the interior of the storage ink tank 20, and ink meniscus formed at the ink ejecting port in the recording head 20a is not destroyed. Further, air does not enter the recording head 20a or the storage ink tank 20 through the ink ejecting port. This ensures that the ink is sucked from the main tank 22 and supplied to the interior of the storage ink tank 20.

[0015] Then, as shown in FIG. 13, when the level 41b of the ink in the storage ink tank 20 reaches the gas

transmitting member 48, the ink refilling is automatically stopped because the gas transmitting member 48 does not transmit liquids such as inks therethrough. Subsequently, as shown in FIG. 14, the carriage moves in the direction of the arrow 35 to separate the ink intake port 20b and the suction port 53 from the corresponding joints 101 and 102, thereby completing the series of refilling operations.

[0016] The above-described conventional ink tank, however, has the following problems:

[0017] That is, as described above, when the level 41b of the ink in the storage ink tank 20 reaches the gas transmitting member 48, the ink refilling is automatically stopped because the gas transmitting member 48 does not transmit liquids such as inks therethrough. For a certain gas transmitting member 48, exerting a certain amount or more of negative pressure may destroy the gas transmitting member 48 to eliminate its inherent function of separating a gas and a liquid from each other, thus causing the ink, a liquid, to be also sucked. Consequently, a large amount of ink may be sucked from the storage ink tank 20 to waste the ink, the ink may flow into the suction pump 31 to destroy it, or a waste ink may contaminate the recording apparatus.

[0018] It is thus an object of the present invention to provide an ink tank, an ink jet recording head, an ink jet cartridge, and an ink jet recording apparatus which are durable enough to allow the ink tank to be refilled many times and which prevent the original gas-liquid separating function of a gas transmitting member as a gas-liquid separating means from being destroyed due to excessive negative pressure exerted on the gas transmitting means as described above, thereby achieving an appropriate ink refilling operation and a reliable ink sucking and supplying operation.

[0019] To attain the above object, the present invention provides an ink tank which supplies an ink to an ink jet recording head via an ink supplying port, which can supply the ink by introducing negative pressure therein, and which has a gas-liquid separating means in a suction port through which the negative pressure required to suck and supply the ink is introduced, the gas-liquid separating means transmitting gases therethrough while not transmitting the gas therethrough, the ink tank being characterized by having a fixed-negative-pressure generating means provided between the gas-liquid separating means and a source of the negative-pressure required to suck and supply the ink, the fixed-negative-pressure generating means preventing a fixed amount or more of negative pressure from being exerted on the gas-liquid separating means. This provides an ink tank which is durable enough to be refilled with the ink many times and which prevents the original gas-liquid separating function of the gas transmitting member as a gas-liquid separating means from being destroyed due to excessive negative pressure exerted on the gas transmitting member, thereby achieving an appropriate ink refilling operation and a reliable ink sucking and sup-

plying operation.

[0020] The ink tank of the present invention is also characterized by including as the fixed-negative-pressure generating means, a suction pump having a negative-pressure sensor. This prevents the original gas-liquid separating function of the gas transmitting member as a gas-liquid separating means from being destroyed due to excessive negative pressure exerted on the gas transmitting member, thereby achieving an appropriate ink refilling operation and a reliable ink sucking and supplying operation.

[0021] The ink tank of the present invention is further characterized by including a tube pump as the fixed-negative-pressure generating means. This prevents the original gas-liquid separating function of the gas transmitting member as a gas-liquid separating means from being destroyed due to excessive negative pressure exerted on the gas transmitting member, thereby achieving an appropriate ink refilling operation and a reliable ink sucking and supplying operation.

[0022] The ink tank of the present invention is further characterized by including a diaphragm pump as the fixed-negative-pressure generating means. This prevents the original gas-liquid separating function of the gas transmitting member as a gas-liquid separating means from being destroyed due to excessive negative pressure exerted on the gas transmitting member, thereby achieving an appropriate ink refilling operation and a reliable ink sucking and supplying operation.

[0023] The present invention provides an ink jet recording head installed on an ink tank which supplies an ink to an ink jet recording head via an ink supplying port, which can supply the ink by introducing negative pressure therein, and which has a gas-liquid separating means in a suction port through which the negative pressure required to suck and supply the ink is introduced, the gas-liquid separating means transmitting gases therethrough while not transmitting the gas therethrough, the ink jet recording head being characterized by having a fixed-negative-pressure generating means provided between the gas-liquid separating means and a source of the negative-pressure required to suck and supply the ink, the fixed-negative-pressure generating means preventing a fixed amount or more of negative pressure from being exerted on the gas-liquid separating means. This prevents the original gas-liquid separating function of the gas transmitting member as a gas-liquid separating means from being destroyed due to excessive negative pressure exerted on the gas transmitting member, thereby achieving an appropriate ink refilling operation and a reliable ink sucking and supplying operation.

[0024] The ink jet recording head of the present invention is also characterized by including as the fixed-negative-pressure generating means, a suction pump having a negative-pressure sensor. This enables the ink jet recording head to be appropriately produced so as to have a simple configuration, thereby achieving an ap-

appropriate ink refilling operation and a reliable ink sucking and supplying operation.

[0025] The ink jet recording head of the present invention is further characterized by including a tube pump as the fixed-negative-pressure generating means. This enables the ink jet recording head to be appropriately produced so as to have a simple configuration, thereby achieving an appropriate ink refilling operation and a reliable ink sucking and supplying operation.

[0026] The ink jet recording head of the present invention is further characterized by having a diaphragm pump as the fixed-negative-pressure generating means. This enables the ink jet recording head to be appropriately produced so as to have a simple configuration.

[0027] The present invention provides an ink jet cartridge having an ink tank installed therein, which supplies an ink to an ink jet recording head via an ink supplying port, which can supply the ink by introducing negative pressure therein, and which has a gas-liquid separating means in a suction port through which the negative pressure required to suck and supply the ink is introduced, the gas-liquid separating means transmitting gases therethrough while not transmitting the gas therethrough, the ink jet cartridge being characterized by having a fixed-negative-pressure generating means provided between the gas-liquid separating means and a source of the negative-pressure required to suck and supply the ink, the fixed-negative-pressure generating means preventing a fixed amount or more of negative pressure from being exerted on the gas-liquid separating means. This enables the ink jet cartridge to be appropriately produced so as to have a simple configuration, and prevents the original gas-liquid separating function of the gas transmitting member as a gas-liquid separating means from being destroyed due to excessive negative pressure exerted on the gas transmitting member, thereby achieving an appropriate ink refilling operation and a reliable ink sucking and supplying operation.

[0028] The ink jet cartridge of the present invention is also characterized by including as the fixed-negative-pressure generating means, a suction pump having a negative-pressure sensor. This enables the ink jet cartridge to be appropriately produced so as to have a simple configuration, thereby achieving an appropriate ink refilling operation and a reliable ink sucking and supplying operation.

[0029] The ink jet cartridge of the present invention is further characterized by including a tube pump as the fixed-negative-pressure generating means. This enables the ink jet cartridge to be appropriately produced so as to have a simple configuration, thereby achieving an appropriate ink refilling operation and a reliable ink sucking and supplying operation.

[0030] The ink jet cartridge of the present invention is further characterized by including a diaphragm pump as

the fixed-negative-pressure generating means. This enables the ink jet cartridge to be appropriately produced so as to have a simple configuration, thereby achieving an appropriate ink refilling operation and a reliable ink sucking and supplying operation.

[0031] The ink jet cartridge of the present invention is further characterized by having a diaphragm pump as the fixed-negative-pressure generating means. This enables the ink jet cartridge to be appropriately produced so as to have a simple configuration.

[0032] The present invention provides an ink jet recording apparatus having an ink tank which supplies an ink to an ink jet recording head via an ink supplying port and which can supply the ink by introducing negative pressure therein, the ink jet recording apparatus having a gas-liquid separating means in a suction port through which the negative pressure required to suck and supply the ink is introduced, the gas-liquid separating means transmitting gases therethrough while not transmitting the gas therethrough, the ink jet recording apparatus being characterized by having a fixed-negative-pressure generating means provided between the gas-liquid separating means and a source of the negative-pressure required to suck and supply the ink, the fixed-negative-pressure generating means preventing a fixed amount or more of negative pressure from being exerted on the gas-liquid separating means. This provides an ink jet recording apparatus which is durable enough to be refilled with the ink many times and which prevents the original gas-liquid separating function of the gas transmitting member as a gas-liquid separating means from being destroyed due to excessive negative pressure exerted on the gas transmitting member, thereby achieving an appropriate ink refilling operation and a reliable ink sucking and supplying operation.

[0033] The ink jet recording apparatus of the present invention is also characterized by including as the fixed-negative-pressure generating means, a suction pump having a negative-pressure sensor. This serves to achieve an appropriate ink refilling operation and a reliable ink sucking and supplying operation, and enables the ink jet recording apparatus to be appropriately produced so as to have a simple configuration.

[0034] The ink jet recording apparatus of the present invention is further characterized by including a tube pump as the fixed-negative-pressure generating means. This serves to achieve an appropriate ink refilling operation and a reliable ink sucking and supplying operation.

[0035] The ink jet recording apparatus of the present invention is further characterized by having a diaphragm pump as the fixed-negative-pressure generating means. This allows the ink to flow appropriately to achieve stable ink refilling and supplying operations.

[0036] The above and other objects, features and advantages of the present invention will become more apparent from the following description of embodiments thereof taken in conjunction with the accompanying

drawings.

FIG. 1 is a schematic view of the configuration of an integral part of an ink jet recording apparatus according to Embodiment 1 of the present invention;

FIG. 2 is a view useful in explaining how the storage ink tank in FIG. 1 is connected to an ink refilling system

FIG. 3 is a view useful in explaining how the ink tank is refilled with an ink from the ink refilling system in FIG. 1

FIG. 4 is a view useful in explaining how the ink tank is refilled with the ink from the ink refilling system in FIG. 1

FIG. 5 is a view useful in explaining how the ink refilling by the ink supplying system in FIG. 1 is stopped;

FIG. 6 is a view useful in explaining an operation performed after the ink refilling by the ink supplying system in FIG. 1 has been completed;

FIG. 7 is a schematic view of a tubeless configuration showing Embodiment 2 of the present invention

FIG. 8 is a schematic view of the configuration of a diaphragm pump showing Embodiment 3 of the present invention;

FIG. 9 is a schematic view of the configuration of an integral part of an ink jet recording apparatus of a conventional form;

FIG. 10 is a view useful in explaining how the storage ink tank in FIG. 9 is connected to an ink refilling system;

FIG. 11 is a view useful in explaining how the ink tank is refilled with an ink from the ink refilling system in FIG. 9;

FIG. 12 is a view useful in explaining how the ink tank is refilled with the ink from the ink refilling system in FIG. 9;

FIG. 13 is a view useful in explaining how the ink refilling by the ink supplying system in FIG. 9 is stopped; and

FIG. 14 is a view useful in explaining an operation performed after the ink refilling by the ink supplying system in FIG. 9 has been completed.

[0037] The present invention provides an ink tank, an ink jet recording head, an ink jet cartridge, and an ink jet recording apparatus. the present invention provides an ink tank which supplies an ink to the ink jet recording head via an ink supplying port, which can supply the ink by introducing negative pressure therein, and which has a gas-liquid separating means in a suction port through which the negative pressure required to suck and supply the ink is introduced, the gas-liquid separating means transmitting gases therethrough while not transmitting the gas therethrough, wherein the ink tank has a fixed-negative-pressure generating means provided between the gas-liquid separating means and a

source of the negative-pressure required to suck and supply the ink, the fixed-negative-pressure generating means comprising a suction pump, a tube pump, a diaphragm pump or the like which has a negative-pressure sensor and preventing a fixed amount or more of negative pressure from being exerted on the gas-liquid separating means. This provides a compact and reliable ink jet recording apparatus which is durable enough to be refilled with the ink many times and which prevents the original gas-liquid separating function of the gas transmitting member as a gas-liquid separating means from being destroyed due to excessive negative pressure exerted on the gas transmitting member, thereby achieving an appropriate ink refilling operation and a reliable ink sucking and supplying operation.

[0038] An embodiment of the ink tank, ink jet recording head, ink jet cartridge, and ink jet recording apparatus of the present invention will be described below in detail with reference to the drawings.

[0039] In the embodiment described below, a serial-scan-based ink jet recording apparatus will be explained by way of example.

(Embodiment 1)

[0040] An integral part of the serial-scan-based ink jet recording apparatus of the present invention will be shown based on FIGS. 1 to 6.

[0041] As shown in FIG. 1, a storage ink tank 20 acting as a sub-ink tank includes an ink jet recording head capable of ejecting an ink, that is, a recording head 20a and is removably mounted on a carriage (not shown) of the serial-scan-based ink jet recording apparatus. The recording head 20a ejects an ink from an ink ejecting port in a nozzle 44 in the storage ink tank 20 based on image information. The storage ink tank 20 also has an ink supplying port 20f for supplying the ink from the storage ink tank 20 to the recording head 20a. The nozzle 44 includes an ejection energy generating means generating energy required to eject the ink. Such an ejection energy generating means may comprise an electrothermal converter for generating thermal energy. Furthermore, the carriage (not shown) is moved by an appropriate movement mechanism in the main scan direction shown by arrows 28 and 35. Further, recorded media are conveyed by a transfer means in a subscan direction crossing the main scan direction.

[0042] In such a recording apparatus, an image can sequentially be recorded on the recorded medium by repeating a main scan of the carriage with the recording head 20a and the storage ink tank 20 mounted thereon and a subscan of the recorded medium.

[0043] The storage ink tank 20 has a suction port 53 and an ink intake port 20b formed in a side thereof. The suction port 53 is in communication with the interior of the storage ink tank 20 via a suction passage 53a, and a gas transmitting member 48 is provided at the site of the opening of the suction passage 53a in the storage

ink tank 20. The gas transmitting member 48 has, as a gas-liquid separating means, a function of transmitting gases therethrough while not transmitting inks therethrough. For example, the gas transmitting member 48 preferably comprise a thin sheet formed of an ethylene tetrafluoride resin, a similar porous resin material, or the like. Additionally, the storage ink tank 20 has an ink absorber 41a accommodated therein, for sucking and holding the ink.

[0044] A filter 103 and a valve 104 are provided in the supplying port 20f. The valve 104 is shaped like a seat and has its proximal end welded to the filter 103. The valve 104 functions to open and close the supplying port 20f depending on the internal pressure of the storage ink tank 20.

[0045] Further, the storage ink tank 20 can be connected to a main tank 22 of the recording apparatus main body via a tube 21a by means of a supplying joint 101 that is connectable to the ink intake port 20b. The joint 101 and a joint 102 are disposed in the recording apparatus main body so as to lie opposite to the ink intake port 20b and the suction port 53 in the scan direction 35 of the carriage.

[0046] During a recording operation, the valve 104 is open and the ink is supplied from the storage ink tank 20 to the recording head 20a, as shown in FIG. 1.

[0047] FIGS. 2 to 6 are views useful in explaining an operation of refilling the above described ink tank with the ink.

[0048] In ink refilling, the carriage is first moved in the direction of the arrow 28 to connect the ink intake port 20b and the suction port 53 to the corresponding joints 101 and 102, as shown in FIG. 2. Subsequently, the suction pump 31 performs a suction operation to suck air from the storage ink tank 20 via the gas transmitting member 48 to set the interior of the storage ink tank 20 at negative pressure. The negative pressure in the storage ink tank 20 causes the ink in the main tank 22 to be sucked to the interior of the storage ink tank 20 as shown in FIGS. 3 and 4.

[0049] In this case, the negative pressure in the storage ink tank 20 causes the valve 104 to close the supplying port 20f, as shown in FIGS. 3 and 4. Accordingly, the ink in the recording head 20a is not sucked to the interior of the storage ink tank 20, and ink meniscus formed at the ink ejecting port in the recording head 20a is not destroyed. Further, air does not enter the recording head 20a or the storage ink tank 20 through the ink ejecting port. This ensures that the ink is sucked and supplied to the interior of the storage ink tank 20.

[0050] Then, as shown in FIG. 5, when the level 41b of the ink in the storage ink tank 20 reaches the gas transmitting member 48, the ink refilling is automatically stopped because the gas transmitting member 48 does not transmit liquids such as inks therethrough.

[0051] At this time, however, the negative pressure rises rapidly and persists up to the maximum suction capability of the suction pump 31 unless the latter is not

stopped, resulting in excessive negative pressure in the gas transmitting member 48. Thus, a negative-pressure sensor 106 is installed in the middle of a conduit 55 located between the suction pump 31 and the joint 102 so that a drive source (not shown) for the suction pump 31 can be turned off once such a preset negative pressure that the gas transmitting member 48 is not destroyed is reached, thus preventing the destruction of the gas transmitting member 48.

[0052] In this example, the gas transmitting member 48 comprises Goatex (a trade name) and has a thickness of 30 μm , and the negative pressure is set at 0.2 atm. The negative-pressure sensor 106 comprises, for example, a semiconductor or a diaphragm that is displaced under negative pressure, and the negative-pressure sensor 106 is not limited to the position shown in the figure but may be positioned anywhere between the gas transmission member 48 and the suction pump 31.

[0053] Subsequently, as shown in FIG. 6, the carriage 19 moves in the direction of the arrow 35 to separate and remove the ink intake port 20b and the suction port 53 from the corresponding joints 101 and 102 to thereby complete the series of refilling operations.

(Embodiment 2)

[0054] In the above Embodiment 1, the negative-pressure sensor detects negative pressure in the suction system to stop the drive source for the suction pump 31, but in this Embodiment 2, a tube pump 107 is used as the suction pump 31 as shown in FIG. 7. That is, a tube 108 is used as the conduit 55, and a roller holder 109 moves rotationally to cause two rollers 110 rotationally moved integrally therewith to squeeze the tube 108. After the roller 110 has passed through, the tube 108 attempts to recover its original state. At this time, negative pressure occurs in the tube 108. The value of the negative pressure is such that the gas transmitting member 48 is not destroyed. Since, however, the value of the negative pressure is determined by the recovery force of the tube 108 as described previously, the tube 108 remains collapsed at a certain negative-pressure value, which no longer increases, thereby preventing the gas transmitting member 48 from being destroyed despite the driving of the roller holder 109 by the drive source (not shown).

[0055] The arrangement of the roller 110 at the opposite position prevents the negative pressure in the tube 108 from reaching the atmospheric value to provide an efficient pump form. Further, the material of the tube 108 is preferably Tygo (a trade name) of a vinyl chloride or is formed of silicon or the like.

[0056] In this sequence, to stop the tube pump 107, the driving by the tube pump 107 is turned off once the number of rotations required to fill the empty storage ink tank 20 is reached; this number of rotations is determined by the volume of the storage ink tank 20 and the capacity of the tube pump 107.

(Embodiment 3)

[0057] In Embodiment 3, a diaphragm pump 111 is installed in the conduit 55 as a suction pump.

[0058] That is, as shown in FIG. 8, a housing 112 has the conduit 55 attached thereto, and at an end of the conduit 55, a valve 113 is integrally mounted on the housing 112. A valve 114 is provided outside an aperture in the housing 112 which is located opposite to the valve 113. Furthermore, a diaphragm 115 has a conductive diaphragm holder 117 integrally attached thereto, and the tip of a projection 117a of the diaphragm holder 117 is threaded. A compression coil spring 118 is installed around an outer periphery of the projection 117a, and a stopper 119 compresses the compression coil spring 118. A subhousing 116 has two opposite electric contacts 116a and 116b welded to an aperture in the center thereof and connected to leads 120a and 120b connected to a circuit board.

[0059] Furthermore, the stopper 119 has a pump cam 122 installed thereon and rotating around a shaft 121. When the pump cam 122 pushes the stopper 119, the diaphragm 115 is displaced downward to open the valve 114, while the valve 113 remains blocked to discharge air in a direction A. On the contrary, when the stopper 119 is relieved from the pump cam 122, the diaphragm 115 rises to set the interior of the pump at negative pressure to open the valve 113, while blocking the valve 114, so that air is sucked in a direction B from the conduit 55 to the interior of the diaphragm pump.

[0060] The above operation is repeated to suck air via the gas transmitting member 48 to thereby suck the ink to the interior of the storage ink tank 20. Then, when the ink reaches the gas transmitting member 48 and the tank is then filled with the ink, the negative pressure in the diaphragm pump 111 rises rapidly and the diaphragm 115 thus overcomes resistance force from the compression coil spring 118. Accordingly, the diaphragm 115 remains displaced downward, while the pump cam 122 runs idly, thereby making it no longer possible to suck air. Consequently, the negative pressure is hindered from further acting on the gas transmitting member 48, thus preventing the gas transmitting member 48 from being destroyed. The value of the negative pressure depends on a set value for the compression coil spring 118. This value can be adjusted by the stopper 119, which is threaded. At this time, control may be provided such that the rotation of the pump cam 122 is stopped when the conduction through the leads 120a and 120b is turned off.

[0061] With the above configuration, when the ink reaches the gas transmitting member 48 to raise the negative pressure rapidly, the displacement of the diaphragm 115 is hindered from varying, thereby stopping the sucking to prevent the gas transmitting member 48 from being destroyed. Since the diaphragm also acts as a negative-pressure sensor, no time lag occurs and the diaphragm pump 111 can be stopped.

[0062] Suitable materials of the diaphragm 115 include hydrogen nitride butadiene rubber (HNBR), chlorinated butyl rubber, ethylene-propylene-dienta-polymer (EPDM), and the like.

[0063] The configuration with only one tank has been described, but for a color ink jet recording apparatus, a plurality of the above configurations may of course be arranged in parallel.

[0064] In one form in which the present invention is effectively used, thermal energy generated by an electrothermal converter is utilized to effect film boiling in a liquid to form bubbles therein.

[0065] The present invention has been described in detail with respect to preferred embodiments, and it will now be apparent from the foregoing to those skilled in the art that changes and modifications may be made without departing from the invention in its broader aspect, and it is the intention, therefore, in the apparent claims to cover all such changes and modifications as fall within the true spirit of the invention.

[0066] An ink tank (20) has a fixed-negative-pressure generating means (31, 106) between a gas-liquid separating means (48) and a source (31) of negative pressure required to suck and supply the ink, to prevent a fixed amount or more of negative pressure from being exerted on the gas-liquid separating means (48). An ink jet recording head (20a) is installed on the ink tank (20). An ink jet cartridge is also installed on the ink tank (20). An ink jet recording apparatus has an ink tank (20) which supplies an ink to an ink jet recording head (20a) via an ink supplying port (205), a gas-liquid separating means (48) in a suction port (53) transmitting gases therethrough while not transmitting said ink therethrough, and a fixed-negative-pressure generating means (31, 106) between the gas-liquid separating means (48) and a source (31) of the negative pressure.

Claims

1. An ink tank which supplies an ink to an ink jet recording head via an ink supplying port, which can supply the ink by introducing negative pressure therein, and which has a gas-liquid separating means in a suction port through which the negative pressure required to suck and supply the ink is introduced, said gas-liquid separating means transmitting gases therethrough while not transmitting said ink therethrough, the ink tank being characterized by having:

a fixed-negative-pressure generating means provided between said gas-liquid separating means and a source of the negative pressure required to suck and supply the ink, said fixed-negative-pressure generating means preventing a fixed amount or more of negative pressure from being exerted on said gas-liquid separating means.

2. The ink tank according to Claim 1, **characterized by** including as said fixed-negative-pressure generating means, a suction pump having a negative-pressure sensor.
3. The ink tank according to Claim 1, **characterized by** including a tube pump as said fixed-negative-pressure generating means.
4. The ink tank according to Claim 1, **characterized by** including a diaphragm pump as said fixed-negative-pressure generating means.
5. An ink jet recording head installed on an ink tank which supplies an ink to an ink jet recording head via an ink supplying port, which can supply the ink by introducing negative pressure therein, and which has a gas-liquid separating means in a suction port through which the negative pressure required to suck and supply the ink is introduced, said gas-liquid separating means transmitting gases therethrough while not transmitting said ink therethrough, the ink jet recording head being **characterized by** having:
 - a fixed-negative-pressure generating means provided between said gas-liquid separating means and a source of the negative pressure required to suck and supply the ink, said fixed-negative-pressure generating means preventing a fixed amount or more of negative pressure from being exerted on said gas-liquid separating means.
6. The ink jet recording head according to Claim 5, **characterized by** including as said fixed-negative-pressure generating means, a suction pump having a negative-pressure sensor.
7. The ink jet recording head according to Claim 5, **characterized by** including a tube pump as said fixed-negative-pressure generating means.
8. The ink jet recording head according to Claim 5, **characterized by** having a diaphragm pump as said fixed-negative-pressure generating means.
9. An ink jet cartridge having an ink tank installed therein, which supplies an ink to an ink jet recording head via an ink supplying port, which can supply the ink by introducing negative pressure therein, and which has a gas-liquid separating means in a suction port through which the negative pressure required to suck and supply the ink is introduced, said gas-liquid separating means transmitting gases therethrough while not transmitting said ink therethrough, the ink jet cartridge being **characterized by** having:
 - a fixed-negative-pressure generating means provided between said gas-liquid separating means and a source of the negative pressure required to suck and supply the ink, said fixed-negative-pressure generating means preventing a fixed amount or more of negative pressure from being exerted on said gas-liquid separating means.
10. The ink jet cartridge according to Claim 9, **characterized by** including as said fixed-negative-pressure generating means, a suction pump having a negative-pressure sensor.
11. The ink jet cartridge according to Claim 9, **characterized by** including a tube pump as said fixed-negative-pressure generating means.
12. The ink jet cartridge according to Claim 9 **characterized by** having a diaphragm pump as said fixed-negative-pressure generating means.
13. An ink jet recording apparatus having an ink tank which supplies an ink to an ink jet recording head via an ink supplying port and which can supply the ink by introducing negative pressure therein, the ink jet recording apparatus having a gas-liquid separating means in a suction port through which the negative pressure required to suck and supply the ink is introduced, said gas-liquid separating means transmitting gases therethrough while not transmitting said ink therethrough, the ink jet recording apparatus being **characterized by** having:
 - a fixed-negative-pressure generating means provided between said gas-liquid separating means and a source of the negative pressure required to suck and supply the ink, said fixed-negative-pressure generating means preventing a fixed amount or more of negative pressure from being exerted on said gas-liquid separating means.
14. The ink jet recording apparatus according to Claim 13, **characterized by** including as said fixed-negative-pressure generating means, a suction pump having a negative-pressure sensor.
15. The ink jet recording apparatus according to Claim 13, **characterized by** including a tube pump as said fixed-negative-pressure generating means.
16. The ink jet recording apparatus according to Claim 13, **characterized by** having a diaphragm pump as the fixed-negative-pressure generating means.

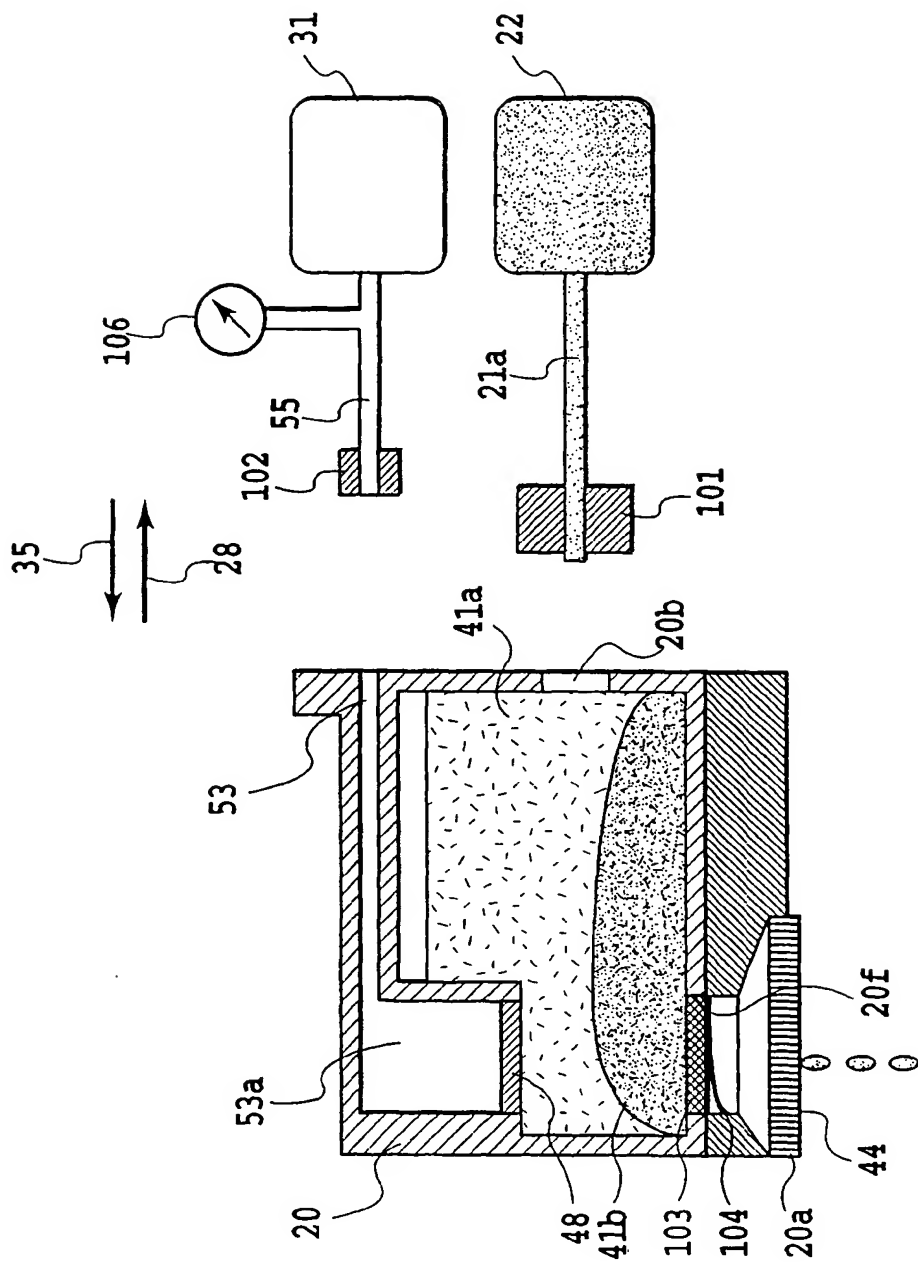


FIG.1

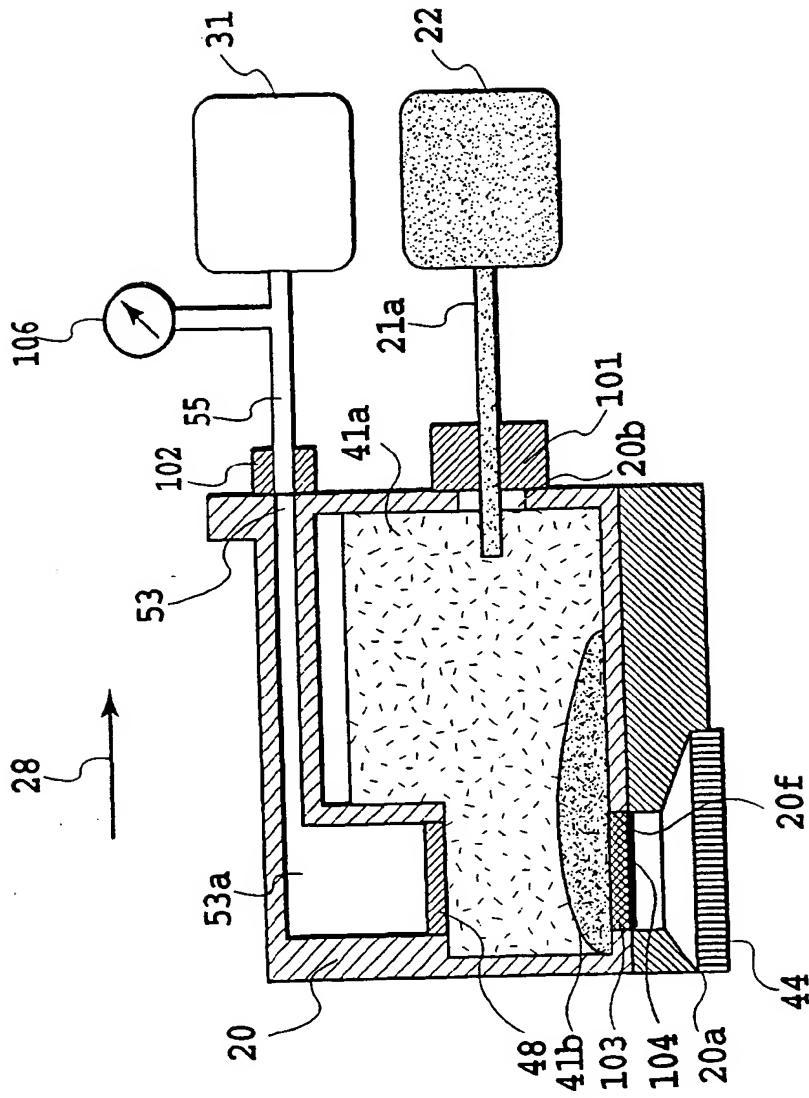


FIG.2

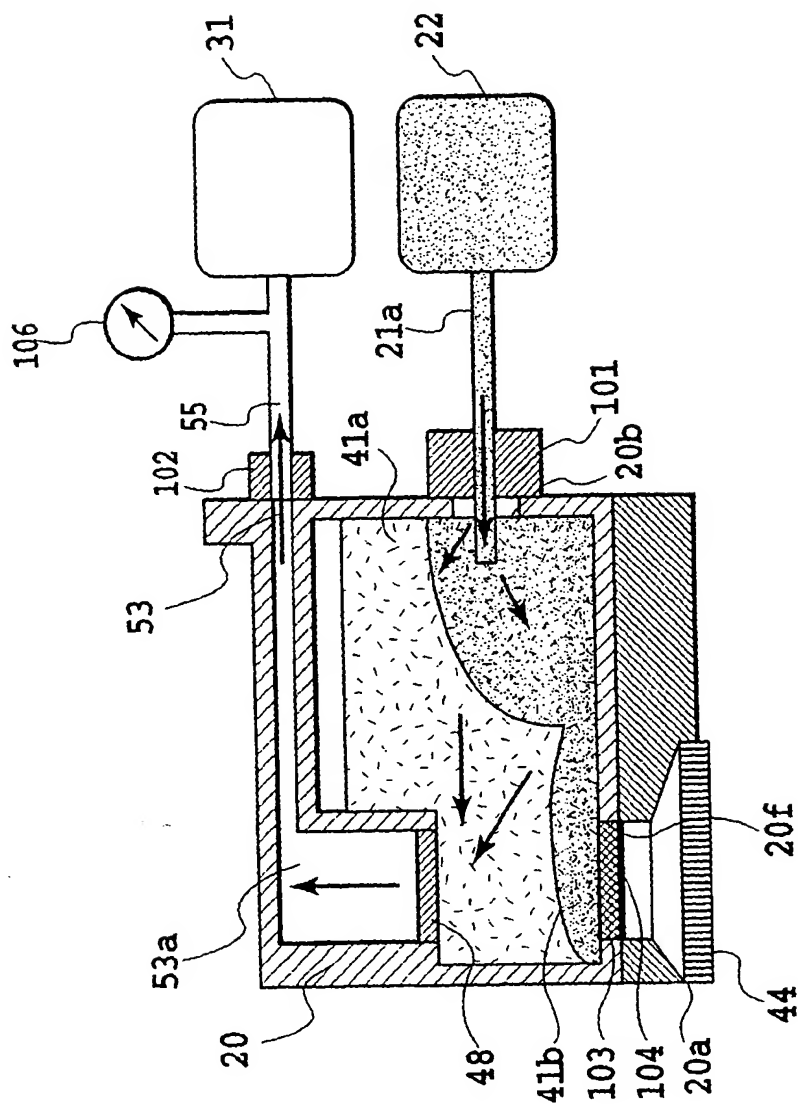


FIG.3

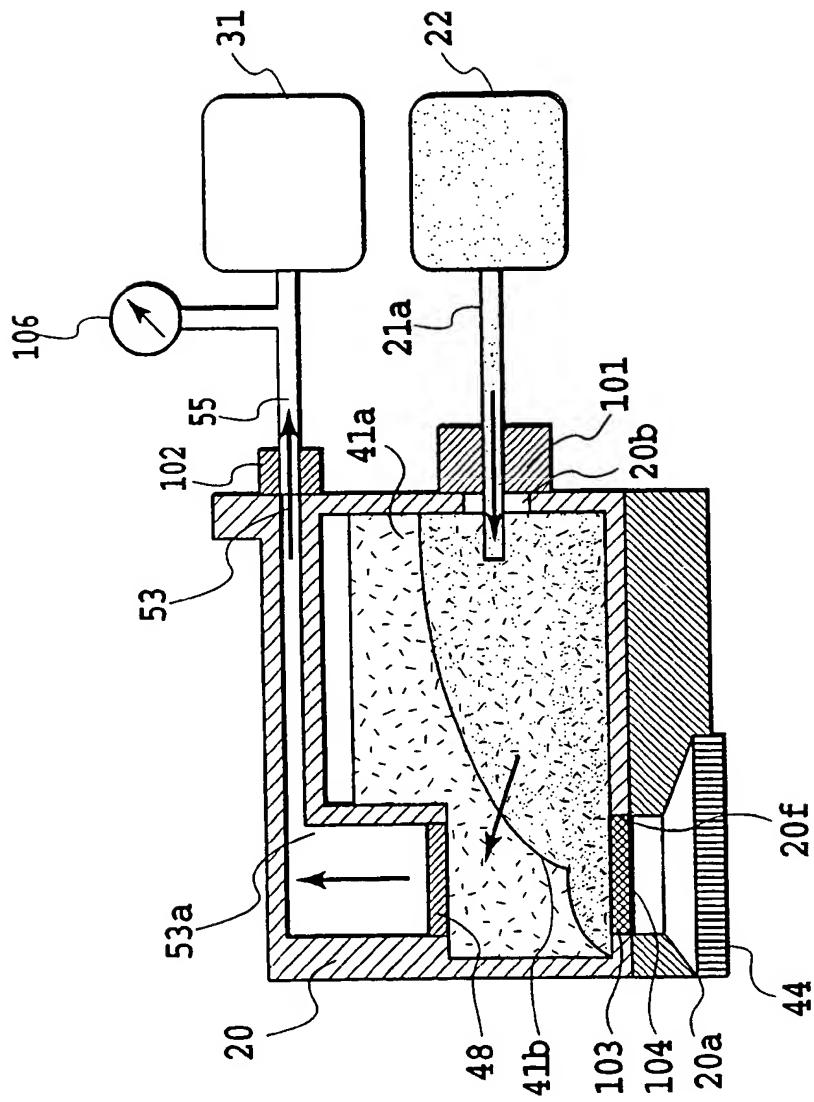


FIG. 4

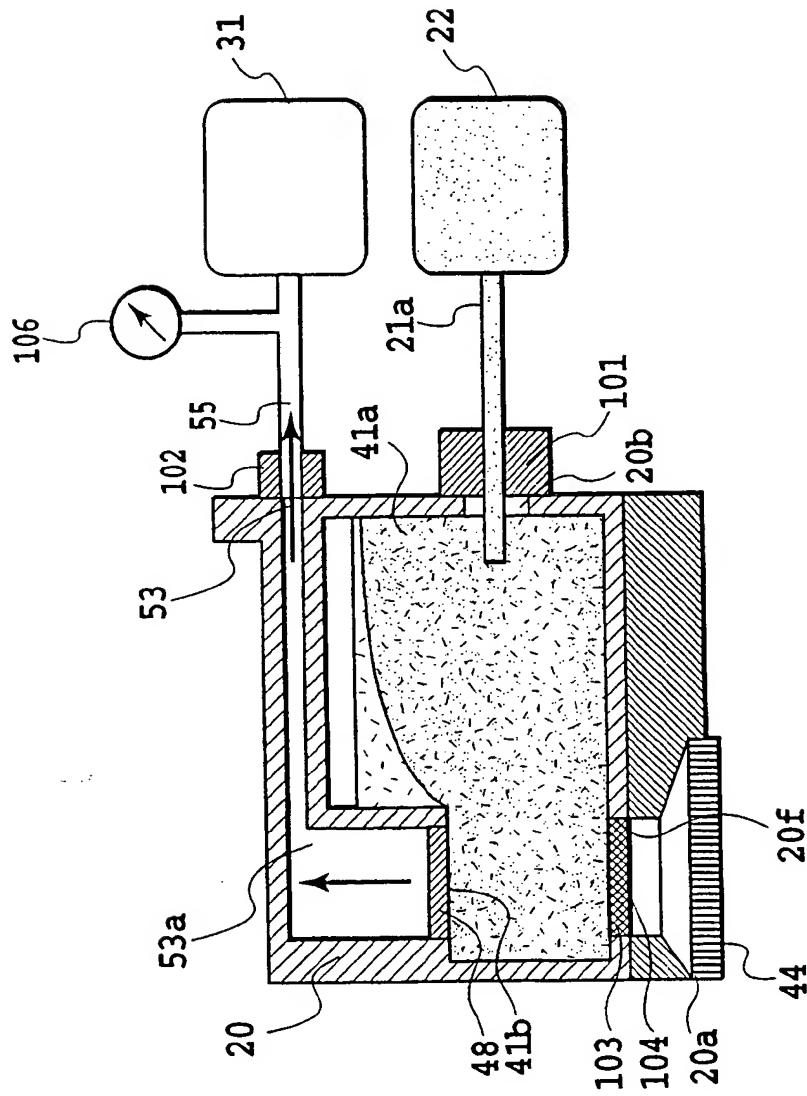


FIG.5

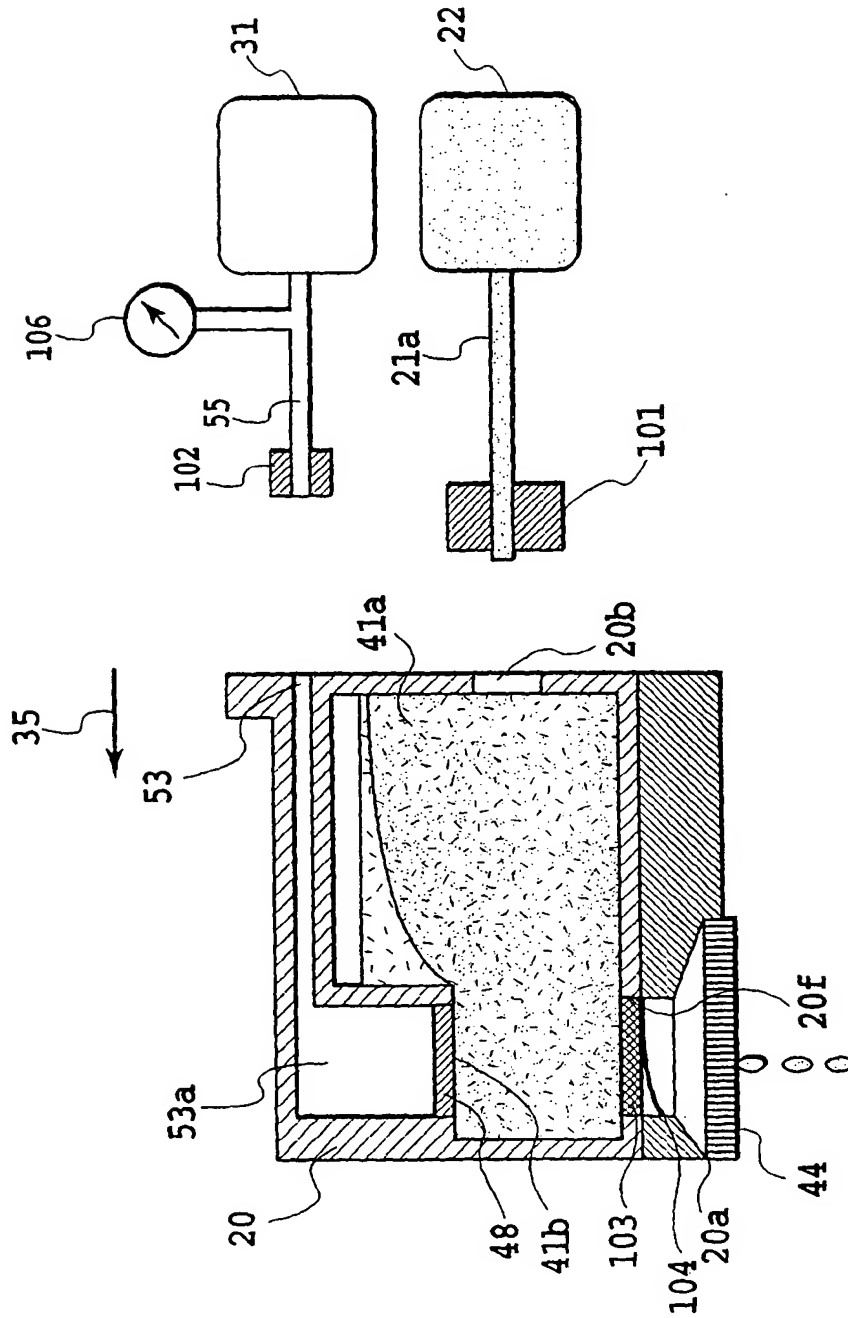


FIG. 6

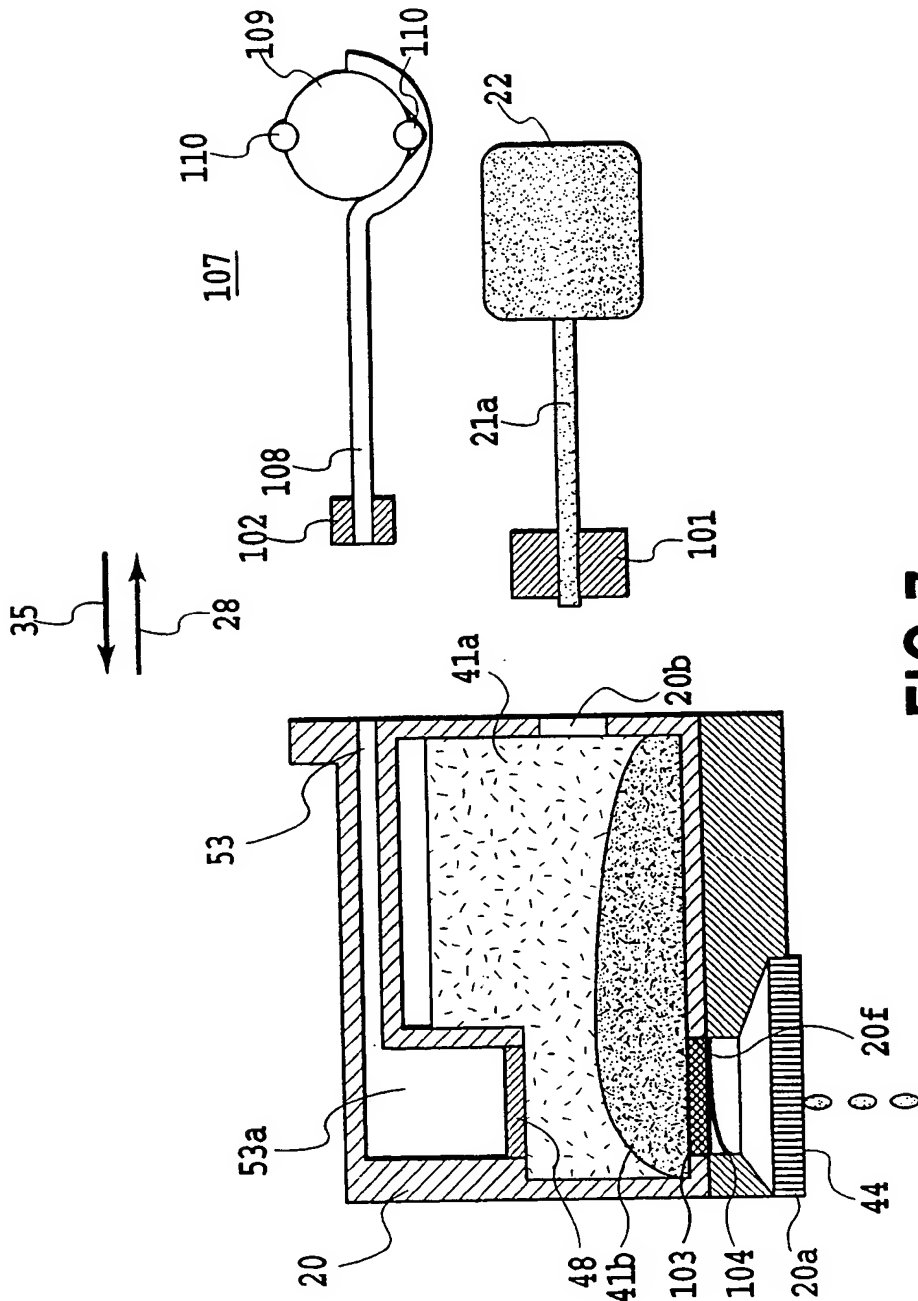


FIG. 7

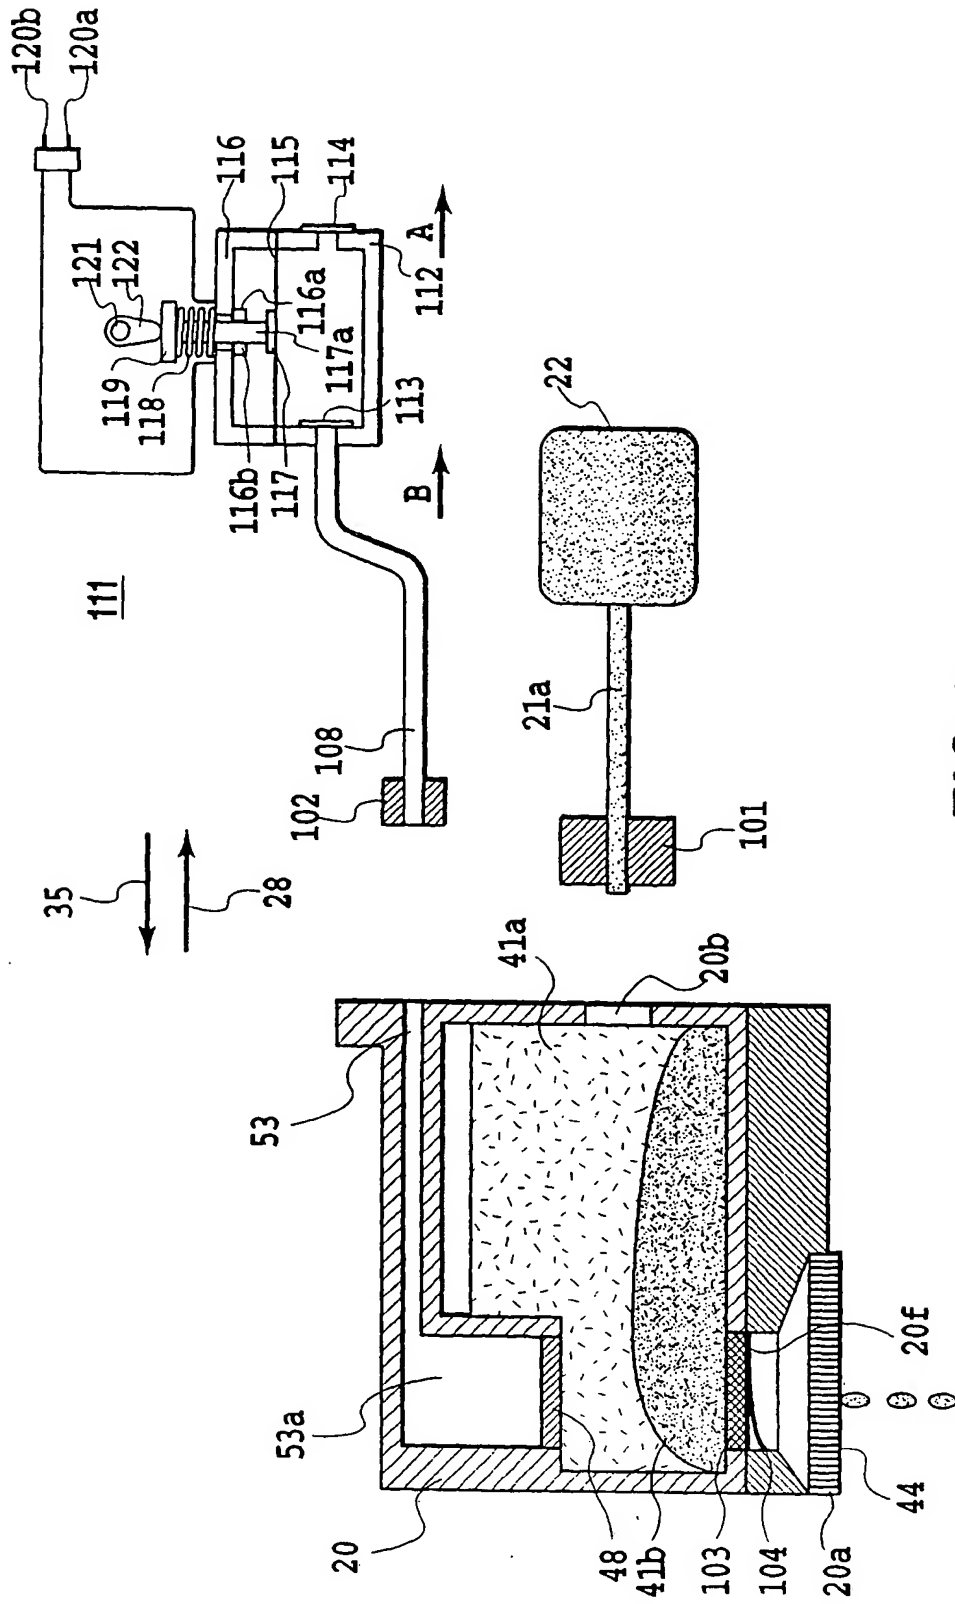


FIG. 8

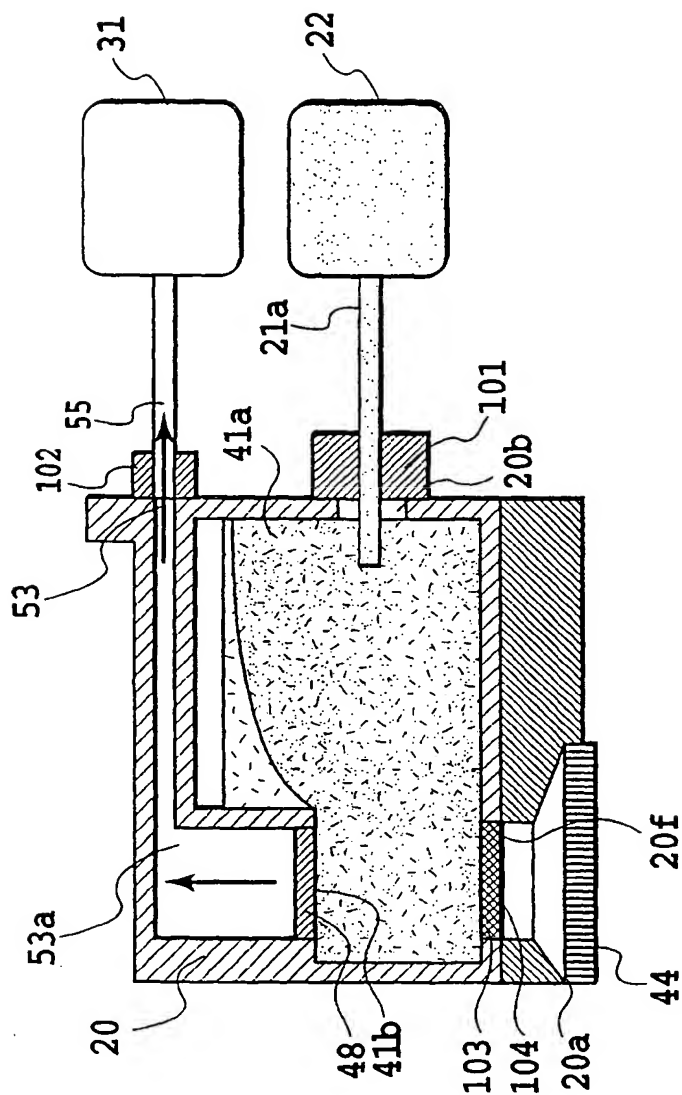


FIG.13

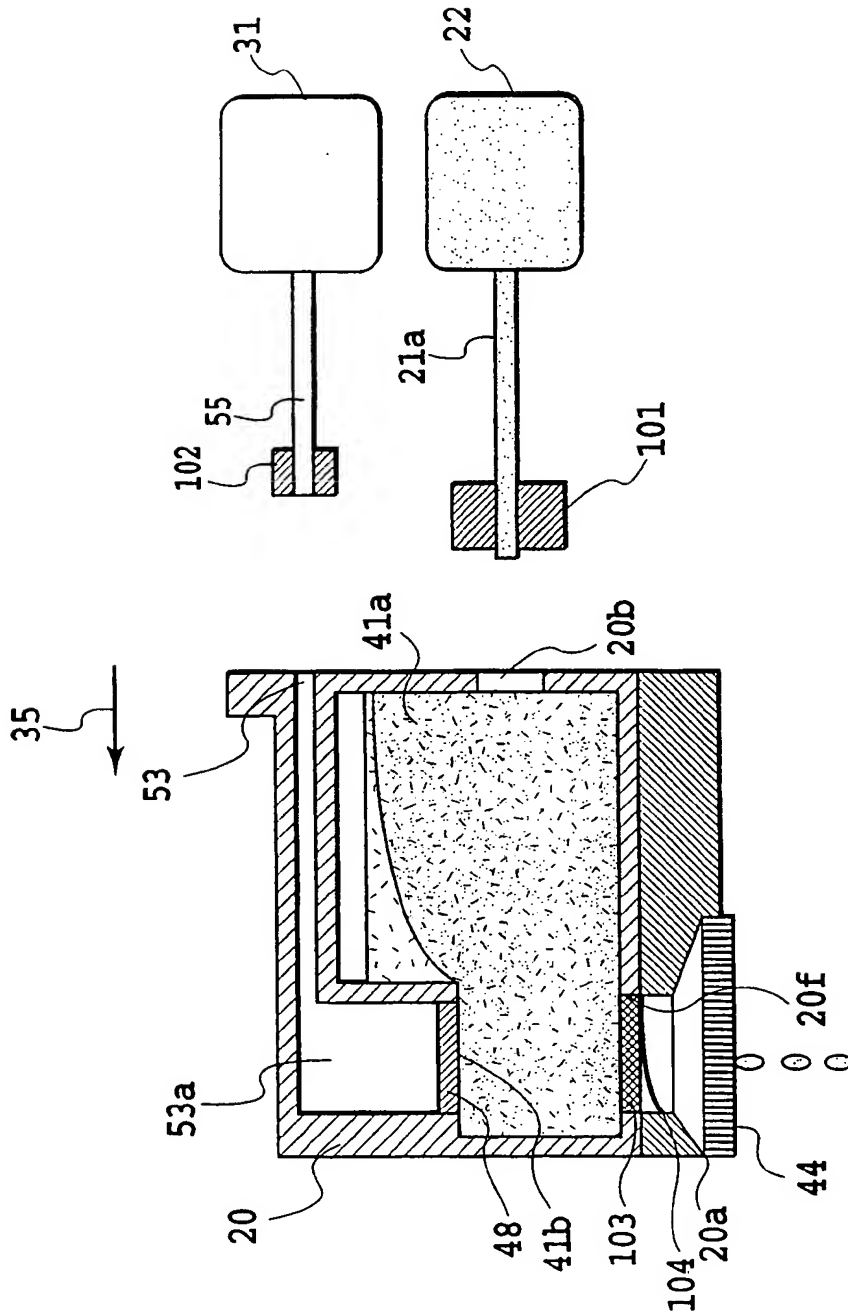


FIG.14

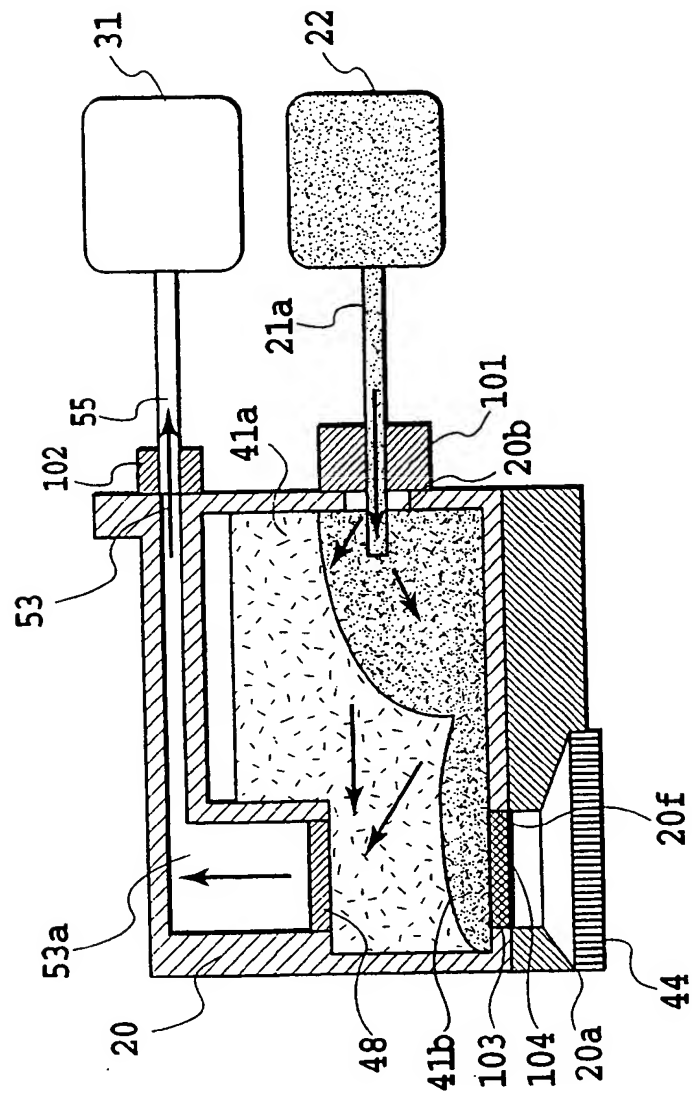


FIG.11

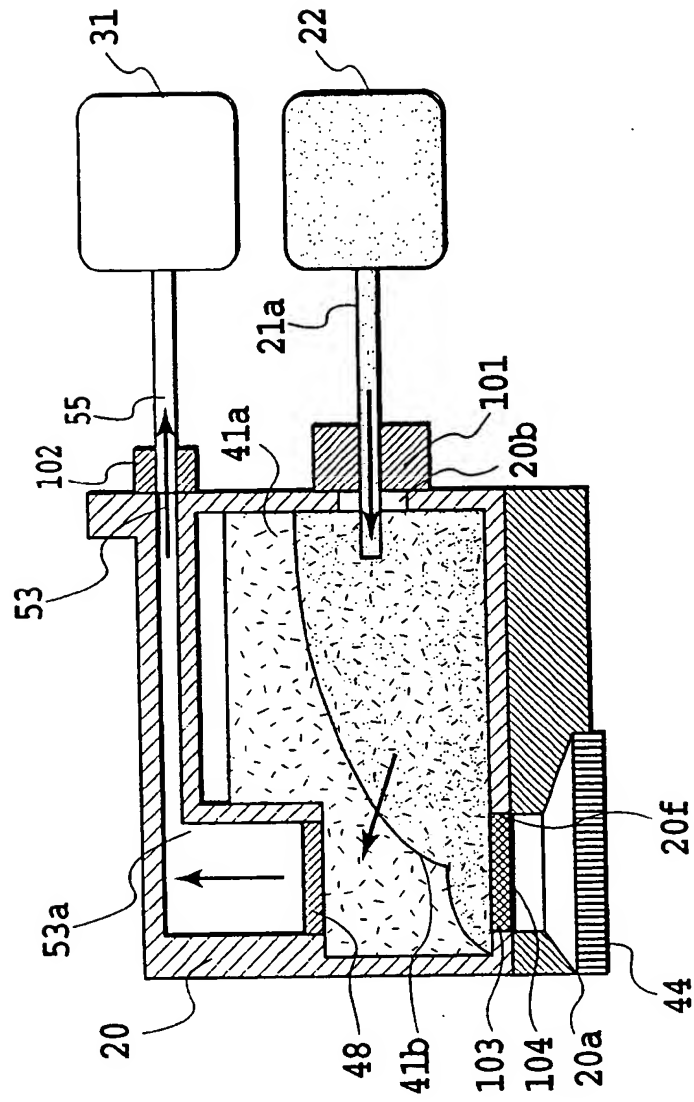


FIG.12

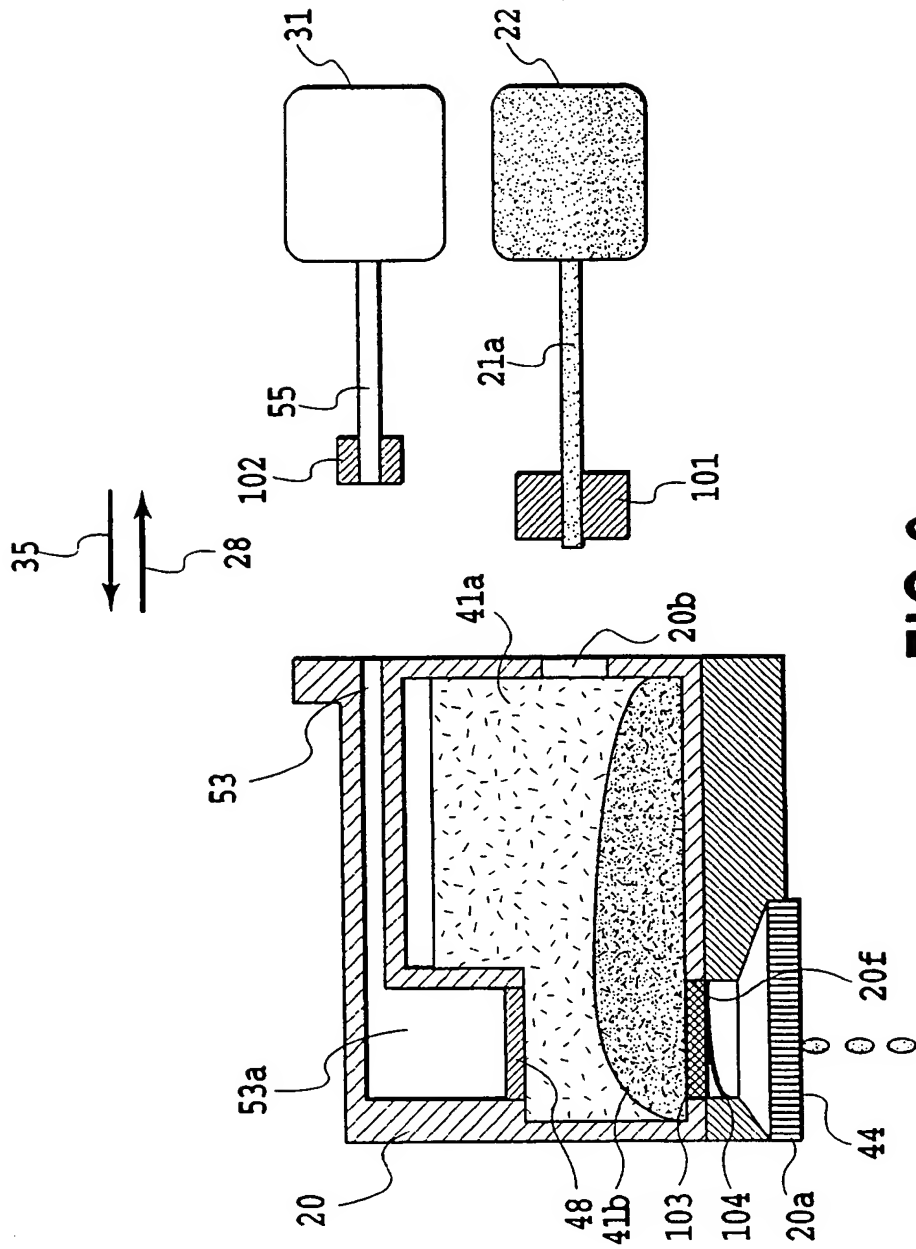


FIG. 9

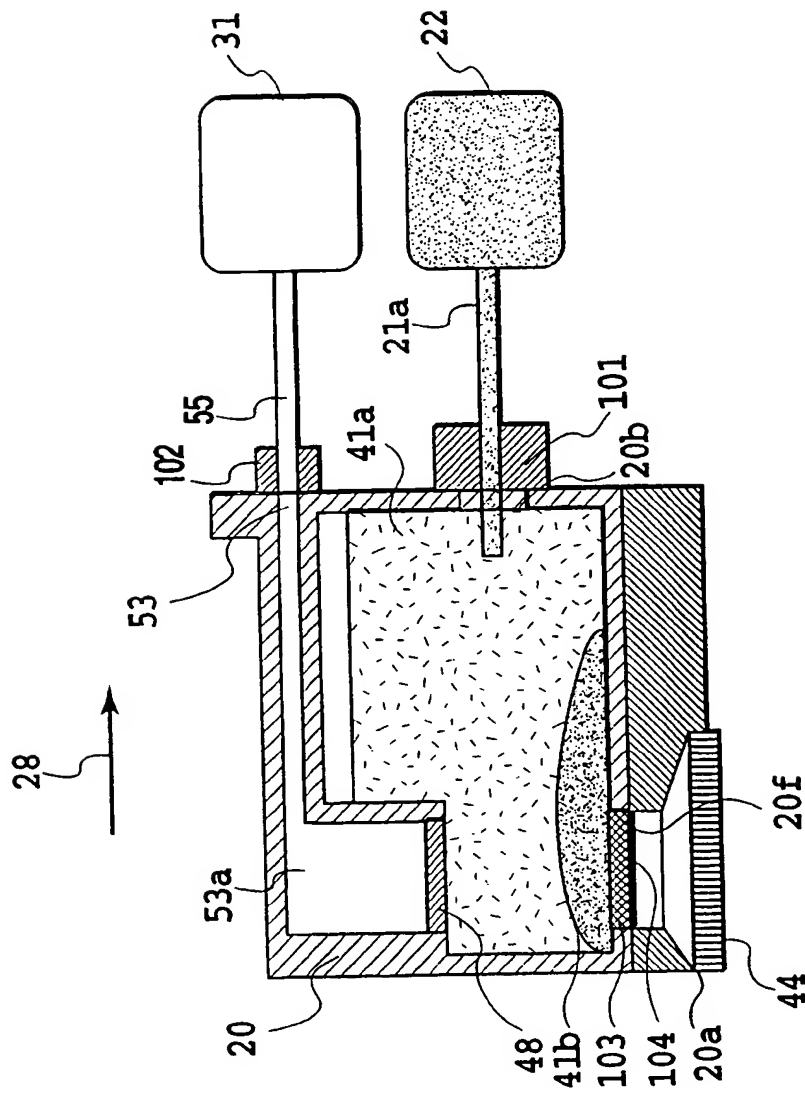


FIG.10